

JRC NAVTEX RECEIVER

NCR-333



The Navtex Receiver NCR-333 is designed to meet or exceed the requirements specified in SOLAS IMO, resolution MSC. 148 (77).

The NAVTEX NCR-333 function receives and displays the various types of information broadcast at frequencies of 518 kHz and either 490 kHz or 4209.5 kHz, such as: navigational warning, meteorological warning, search and rescue information, and other types of information. NCR-333 also provides the function that selects information type and coast station for intended uses.



Features

- Full meet latest resolution MSC. 148 (77) IMO
- 5.7 inch black & white landscape wide LCD screen
- Comfortable visibility by 3 font sizes
- Automatic tune function by GPS
- Printerless type
- Navtex data export function for INS (ECDIS or etc.)

• Features


● Receiving NAVTEX broadcasts

NCR-333 receives NAVTEX broadcasts automatically on 518 kHz and 490 kHz or 4209.5 kHz.

● Large screen allows comfortable visibility

NCR-333 has a 5.7-inch LCD screen display with clear visibility.

It also provides three different character sizes of display, and can be selected at your convenience.



● Message saving function

NCR-333 can store up to 200 message identification codes for 70 hours. Moreover, the stored message of each channel can be saved up to 50 messages permanently.

● Automatically receiving station setting function

NCR-333 can select receiving stations automatically on GPS position data is valid.

● Permanent storage of data settings

NCR-333 can set and store the message type and seashore station that receive to internal memory. The data, therefore, does not need to be re-set, even after power has been turned off.

● Dual voltage supply input

NCR-333 can be used on either 24 V_{DC} or 12 V_{DC} vessels.

● Self-diagnosis function

NCR-333 has automatic self-diagnosis function. This function allows easy maintenance and high system reliability.


● Connection to external equipment

NCR-333 can be used with the JRC Total Navigator (ECDIS) and external serial printers.


• Specifications

| | |
|------------------------------------------|------------------------------------------------------------------------------------|
| Receiving frequency | 518kHz and 490kHz or 4209.5kHz |
| Receiving mode | F1B NAVTEX broadcast |
| Sensitivity | CER better than 1×10^{-2} at $1 \mu\text{V}$ input to 50Ω antenna |
| Display | 5.7-inch Black & White LCD |
| Received message storage function | Each Channels : 200 messages Storage length : 70hours |
| Interface for external units | Serial Interface : 2ports (For Printer and INS) |
| Power supply | 12V~24V DC |

• Dimensions

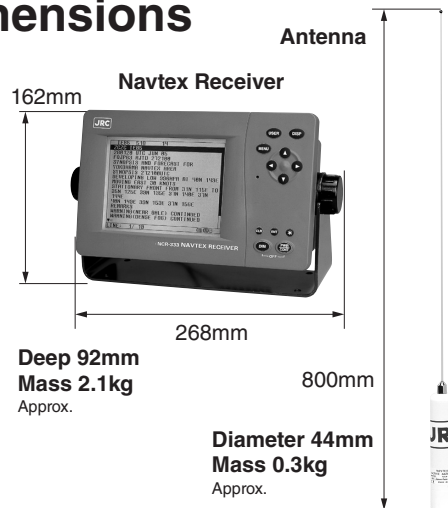

• Configuration

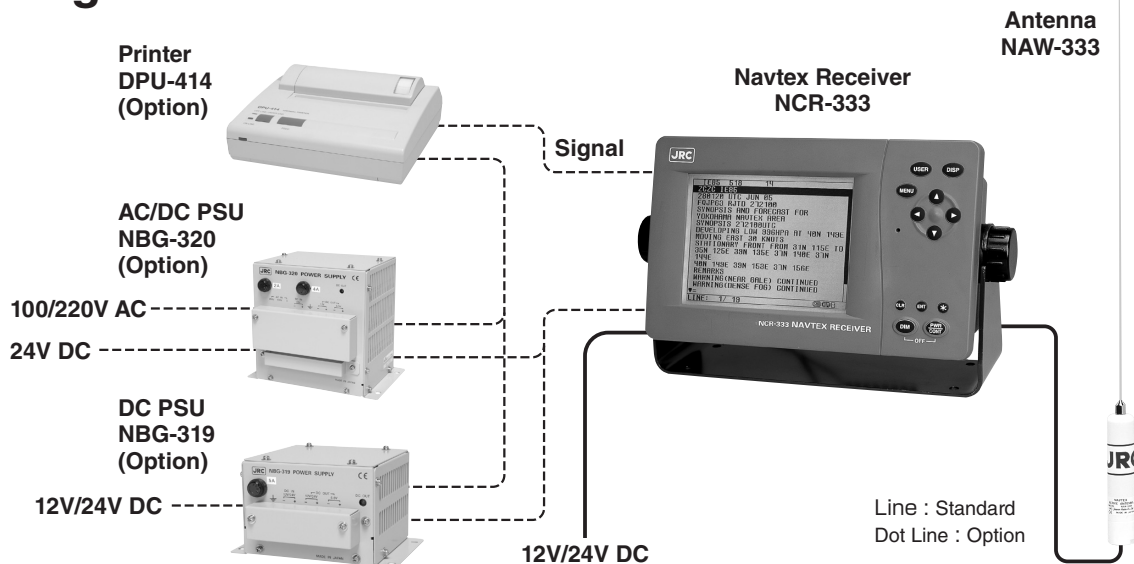

• Specifications may be subject to change without notice.

For further information, contact:



Since 1915

Japan Radio Co., Ltd.

URL <http://www.jrc.co.jp/eng/>

Main Office: Fujisawa bldg. 30-16, Ogikubo 4-chome
Suginami-ku, Tokyo 167-8540, Japan
Telephone: +81-3-6832-1816
Facsimile: +81-3-6832-1845

Overseas Branches : Seattle, Amsterdam, Athens, Manila
Liaison Offices : Taipei, Jakarta, Singapore, Hanoi,
Shanghai, Hamburg, New York